
SOL 2240 Wall Mirror - Specification Sheet

www.kruggusa.com

Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 2600 Lumens
- CRI 90+
- Integrated Defogger

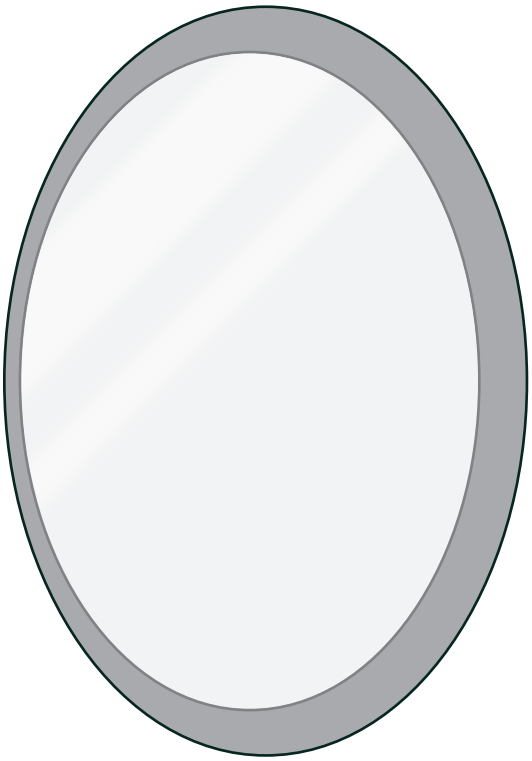

Construction

- Quality polished edge mirror
- Single phase wire installation, silver backed, copper free
- Construction for surface mounting
- Includes installation hardware

Codes/Standards Applicable

- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 37.7W
- Electric Current: 0.32A
- Wattage: 37.7W


Model

- SOL 2240

SOL 2240 Wall Mirror - Specification Sheet

Dimensions

- Height: 40”
- Width: 22”
- Depth: 1-11/16”

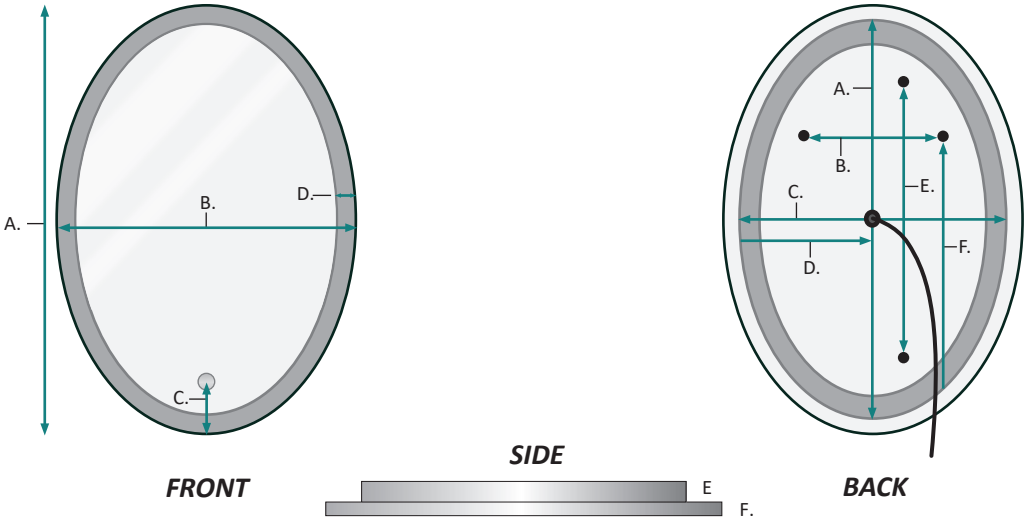

FRONT & SIDE

MODEL	A	B	C	D	E	F
SOL2240	40	22	4-1/2	1-1/4	1-1/2	3/16

BACK

MODEL	A	B	C	D	E	F
SOL2240	24-5/8	14	16-7/16	5-1/2	22-3/8	15